T-3/R TOWER MODULAR SPEAKER



The T-3/R is the epitome of the Signature Series

T System. Encompassing the best of what this system has to offer, the towering T-3/R has the capability of knocking you back in your seat, yet it can reproduce even the softest of whispers.

Dual 1010-SE/R subwoofer sections are used to provide system flexibility, allowing for both full-range and LFE configurations. The T-1/R faithfully reproduces everything it is sent. A must-have for the audio and home theater connoisseur, the T-3/R is definitely not a speaker for the faint of heart. This model is only available in custom veneers, shown here in maple pommele veneer.





SPECIFICATIONS

MODEL NAME:

T-3

SYSTEM TYPE:

Tower Modular Speaker

SERIES

Signature Reference Series T Systems

FREQUENCY RESPONSE

20Hz - 20kHz ± 3dB

SENSITIVITY

91dB (2.83 Volts @ 1 Meter)

RECOMMENDED POWER

500-1300 Watts

DRIVE UNITS

- (4) 10" (254mm) Reference Aluminum Subwoofers
- (4) 6½" (165mm) Reference Aluminum Woofers
- (3) 1.1" (28mm) Reference Silk Dome Tweeters

CROSSOVER FREQUENCY

2,500 Hz

CROSSOVER

24dB/Octave

IMPEDANCE

4 Ohms

CABINET

Custom Veneers Only Choose From 30 Different Real Wood Finishes

GRILLE

Black Cloth

DIMENSIONS

13¼" W x 91¾" H x 18" D (337mm W x 2330mm H x 457mm D)

WEIGHT

237 lbs. (107.50 kg)

WARRANTY

5 Years*

*Warranted for 5 (five) years from date of purchase to be free from defects and workmanship. For more information see your RBH dealer.




High Performance Home Audio Redefining the Way You Experience Sound™


T-3/R


TOWER MODULAR SPEAKER


DIMENSIONS & CONFIGURATIONS

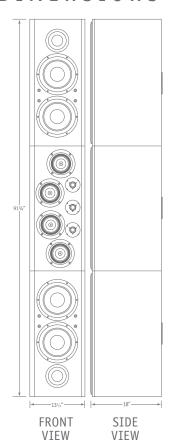

The mid-range and bass drive units of the T System are of the highest quality and feature cutting-edge aluminum cone technology. The two 10-inch long-throw subwoofers deliver plentiful amounts of low frequency information. Mid-bass through lower treble frequencies are accurately reproduced through four 61/2-inch woofers offering extended dynamic range and lower distortion. Three 1-inch silk dome high performance tweeters provide generous crystal clear high frequencies with unbelievable detail and accuracy. The woofers and tweeters are arranged in a dispersion-averaging alignment that focuses the sound at the listening position for unbelievable imaging. Working in harmony, all drive units are governed by an extensive filter network to convey the sonic realism you'd expect from this reference-grade speaker system.











T-2N or 2 each T-1 or T-1/R Modular Speakers
T-2N/R: 2 each 1010-SEN or 1010-SEN/R
Non-powered Subwoofers
2 sets of T-Module Clamps
2 sets of T-Module Feet

T-2P or 2 each T-1 or T-1/R Modular Speakers
T-2P/R: 2 each 1010-SEN or 1010-SEN/R
Non-powered Subwoofers
2 each SA-400 Subwoofer Amplifiers
2 sets of T-Module Clamps

2 sets of T-Module Feet

T-3N or 2 each T-1 or T-1/R Modular Speakers
T-3N/R: 4 each 1010-SEN or 1010-SEN/R
Non-powered Subwoofers
4 sets of T-Module Clamps
2 sets of T-Module Feet

T-3P or 2 each T-1 or T-1/R Modular Speakers
T-3P/R: 4 each 1010-SEN or 1010-SEN/R
Non-powered Subwoofers
4 each SA-400 Subwoofer Amplifiers

4 sets of T-Module Clamps 2 sets of T-Module Feet

Specifications are subject to change. For the most current information visit us online at www.rbhsound.com.