S SERIES POWERED SUBWOOFERS



S-8

POWERED SUBWOOFER

When space is at a premium, yet remarkable bass performance is the goal, it's time for the S-8. Sharing the same 150 Watt amplifier as its larger sibling, the S-8 delivers much more than one would think given its small size. The S-8 is recommended for smaller rooms and areas and makes a perfect complement to the CTx models.

ORDER ONLINE TODAY AT http://rbhsound.com



SPECIFICATIONS

MODEL NAME:

S-8

SERIES:

S (Compatible with all RBH Sound Speakers)

SYSTEM TYPE:

Powered Subwoofer

AMPLIFIER TYPE:

Class D

SUBWOOFER:

8" (203mm) Aluminum Cone

VOLTAGE:

110 and 220

POWER HANDLING:

150 Watts

CROSSOVER FREQUENCIES:

40Hz-150Hz (variable)

FREQUENCY RESPONSE:

32Hz-150Hz (variable)

LFE INPUT:

Yes

LFE OUTPUT:

No

LINE LEVEL INPUT:

Yes

SPEAKER LEVEL INPUT:

NO

SPEAKER LEVEL OUTPUT:

No

PHASE CONTROL:

Yes (Auto On/Off)

CABINET/COLOR:

Medium Density Fiberboard (MDF)/Black

GRILLE:

Black Fabric

FINISHED DIMENSIONS:

11" W x 12-1/2" H x 12-3/4" D

(279mm W x 318mm H x 324mm D)

WEIGHT


19.25 lbs. (8.73 kg)

WARRANTY:

5 Years/1 Year*



SUBWOOFER AMPLIFIER CONTROLS

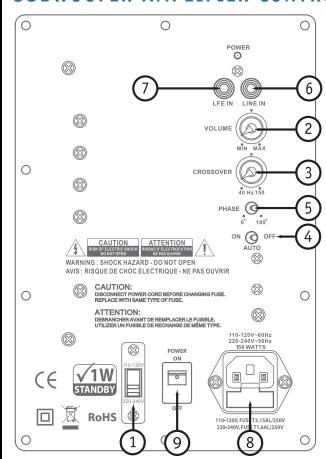

Rock the house without rocking the budget!



382 Marshall Way, Ste. A, Layton, Utah, USA 84041 (800) 543-2205 (801) 543-2200 Fax: (801) 543-3300 http://rbhsound.com

1. Voltage Selector Switch

Auto Signal Tracking

Crossover Frequency Control

2. Volume/Gain Control

5. Phase Control

6. Line Inputs7. LFE In

8. Fuse Access

10. LFE Out

9. Power Switch.

*Warranted for 5 years on the cabinet and woofers, and 1 year on the amplifier from date of purchase to be free from defects and workmanship.

For more information see your RBH dealer. It is RBH Sound policy to continuously incorporate improvements into products; all specifications are subject to change without notice. For the most current information visit us online at http://rbhsound.com. Copyright © 2017 RBH Sound. All Rights Reserved.