SX-66/R ON-WALL SURROUND SPEAKER



Our ultimate on-wall surround. RBH's dynamic proprietary 6½-inch aluminum cone phase plug reference woofers and audiophile 1-inch silk done tweeters will totally immerse you in the movie. The in-phase woofers and out-of-phase tweeters will float the sound around you so convincingly you will escape reality and live in the action. Recommended for medium to large theaters. Easily installed using integrated keyhole brackets.



SPECIFICATIONS

MODEL NAME:

SX-66/R

SYSTEM TYPE:

On-wall Surround Speaker

SERIES

Signature SX Reference Series

FREQUENCY RESPONSE

 $60Hz-20kHz \pm 3dB$

SENSITIVITY

90dB (2.83 Volts @ 1 Meter)

RECOMMENDED POWER

75-225 Watts

DRIVE UNITS

(2) 6-1/2" (165mm) Reference Aluminum Woofers

(2) 1.1" (28mm) Reference Silk Dome Tweeters

TWEETER PROTECTION

Yes

CROSSOVER FREQUENCY

3,000 Hz

CROSSOVER

12dB/Octave

IMPEDANCE

4 Ohms

CABINET

Medium Density Fiberboard (MDF) in a Standard Satin Black Oak or Sandalwood, or 30 Different Custom

Veneer Finishes

GRILLE

Black Cloth

DIMENSIONS

16" W x 14" H x 8-1/2" D

(406mm W x 356mm H x 216mm D)

WEIGHT

23.5 lbs. (10.66 kg)

WARRANTY

5 Years*




High Performance Home Audio Redefining the Way You Experience Sound™

SX-66/R

ON-WALL SURROUND SPEAKER

DIMENSIONS

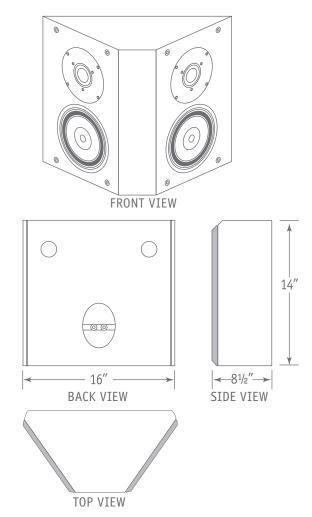

MATCHING SERIES

BOOKSHELF: SX-661/R, SX-61/R

CENTER CHANNELS: SX-6100C/R, SX-661C/R, SX-441C/R **TOWERS:** SX-T1/R, SX-T2/R, SX-T3/R, SX-8300/R, SX-6300/R

SURROUNDS: SX-44/R

SUBWOOFER: SX-10/R, SX-1010N/R, SX-1010P/R, SX-12/R,

SX-1212N/R, SX-1212P/R, SX-88

^{*}Warranted for 5 (five) years from date of purchase to be free from defects and workmanship. For more information see your RBH dealer.

Specifications are subject to change. For the most current information visit us online at www.rbhsound.com.